


Landmark Structures

COMPOSITE ELEVATED TANK STANDARD CAPACITIES

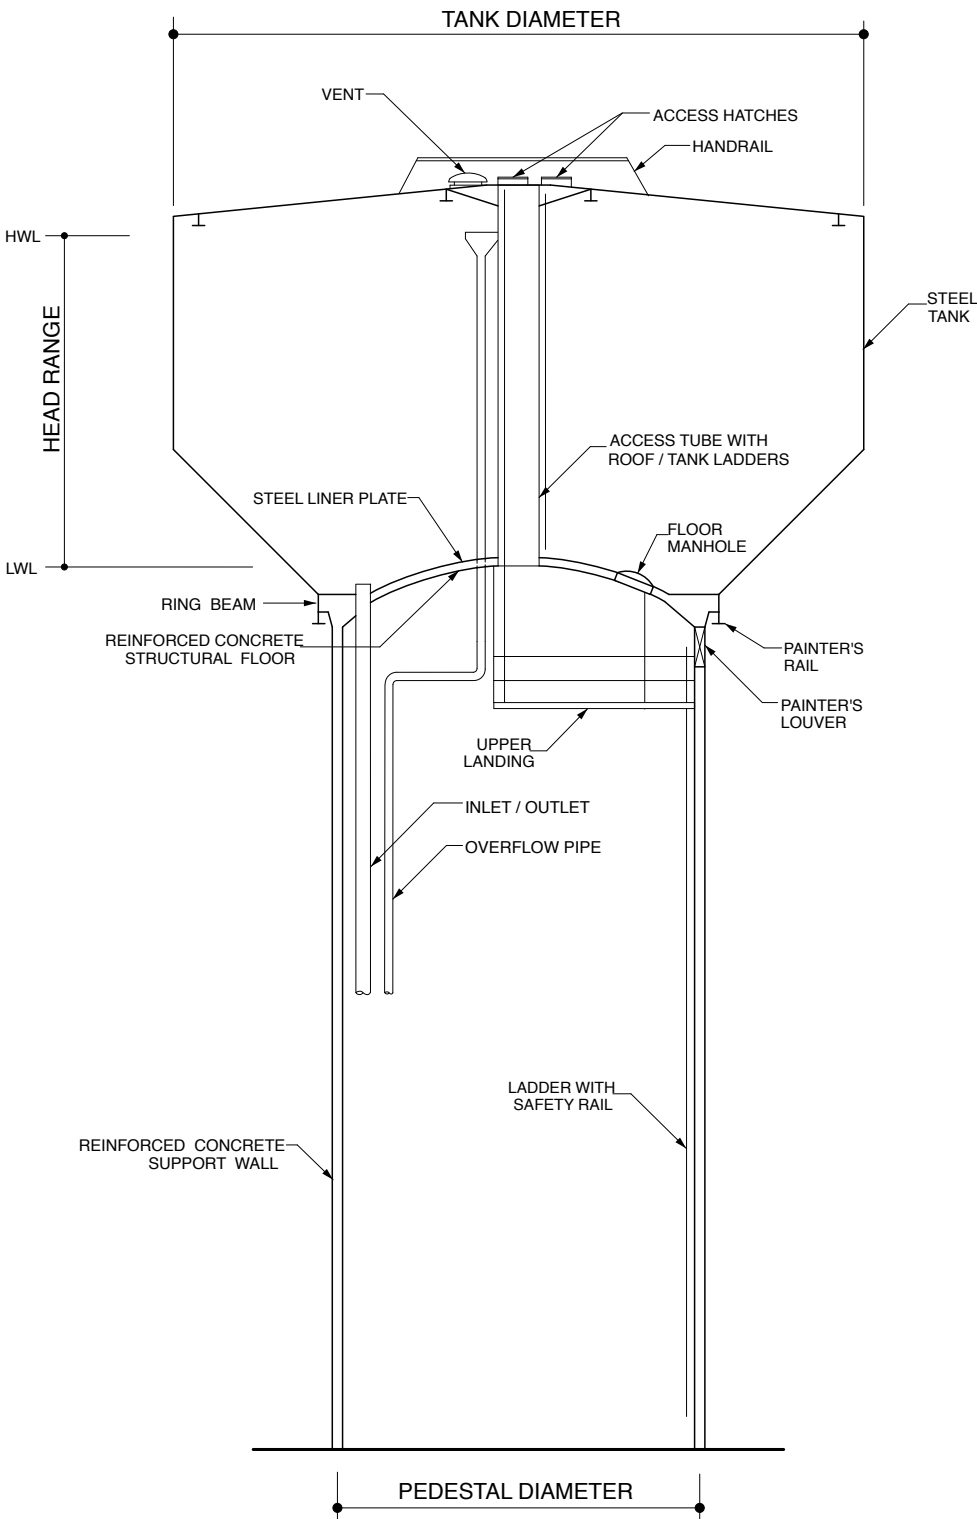

CAPACITY (U.S. Gal.)	HEAD RANGE (Feet)	TANK DIA. (Feet)	PEDESTAL DIA. (Feet)
500,000	30.0 - 35.0	51 - 55	24
750,000	35.0 - 40.0	59 - 65	28
1,000,000	35.0 - 40.0	68 - 74	38
1,250,000	37.5 - 40.0	75 - 80	38
1,500,000	37.5 - 40.0	82 - 87	42
1,750,000	40.0	90 - 95	46
2,000,000	40.0	95 - 100	46
2,500,000	40.0 - 45.0	102 - 112	54
3,000,000	45.0	108 - 115	60

Alternate capacities, head ranges and pedestal diameters are available to suit site conditions, operation requirements or customer preference.

STANDARD ACCESSORIES:

- As shown on drawing
- Man door at base of pedestal
- Reinforced concrete slab on grade

OPTIONAL ACCESSORIES:

- Grade level control room (within pedestal)
- Insulated and heat traced piping for freeze protection
- Control valve and associated piping
- Overhead door (manual or motorized)
- Interior and exterior lighting, obstruction lighting, etc.
- Interior storage floors, architectural finishes, etc.
- Tank mixing systems